
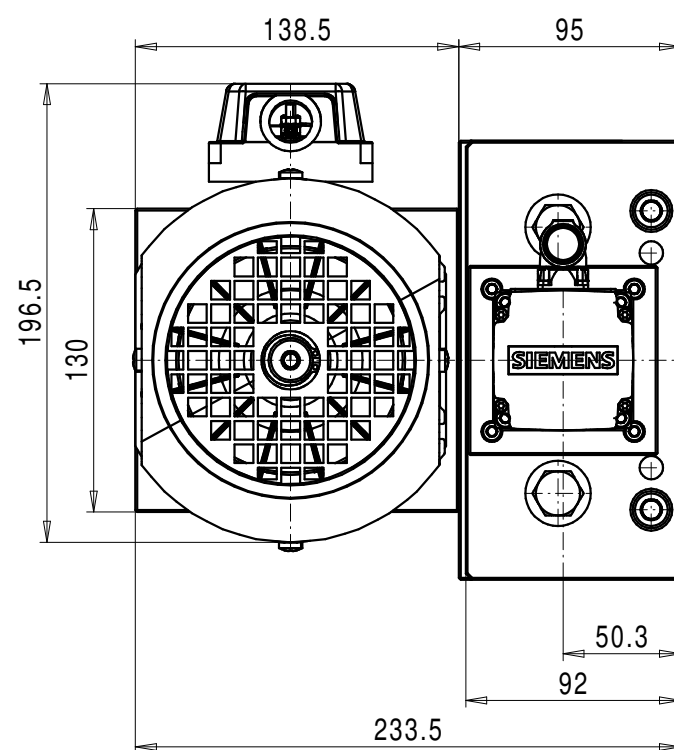
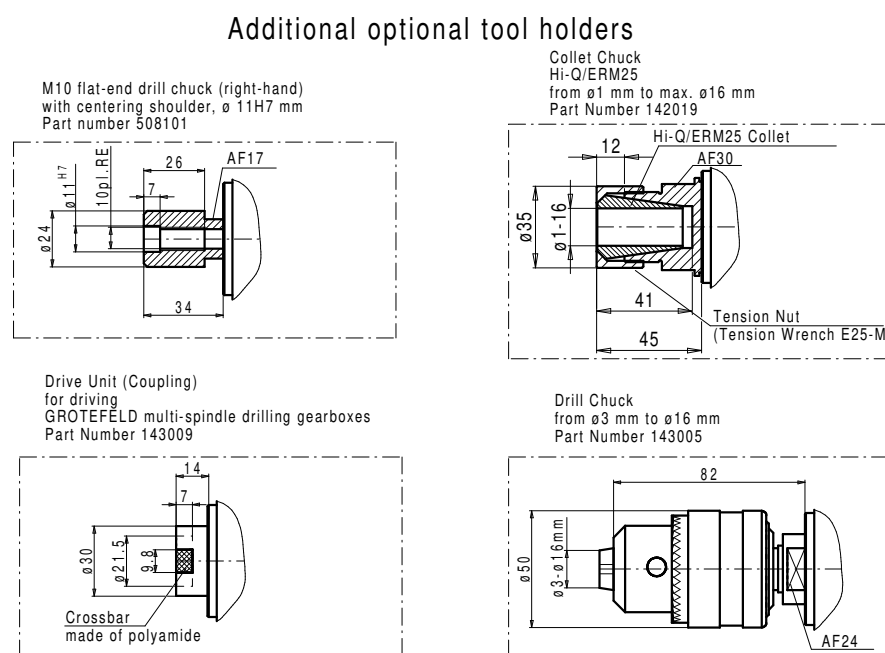
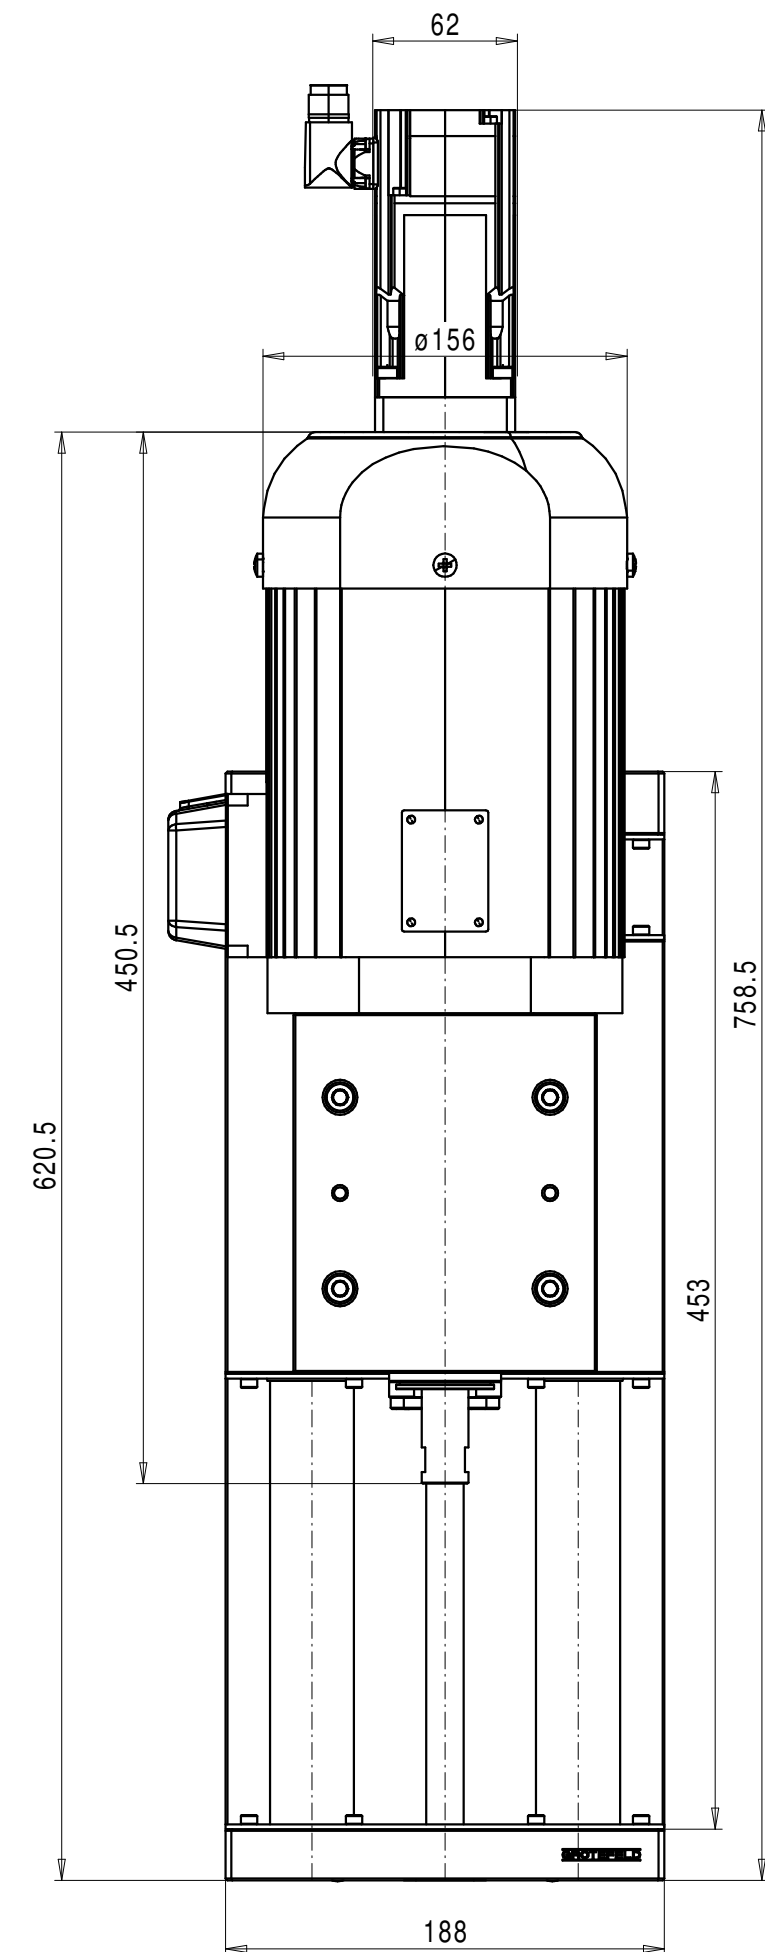


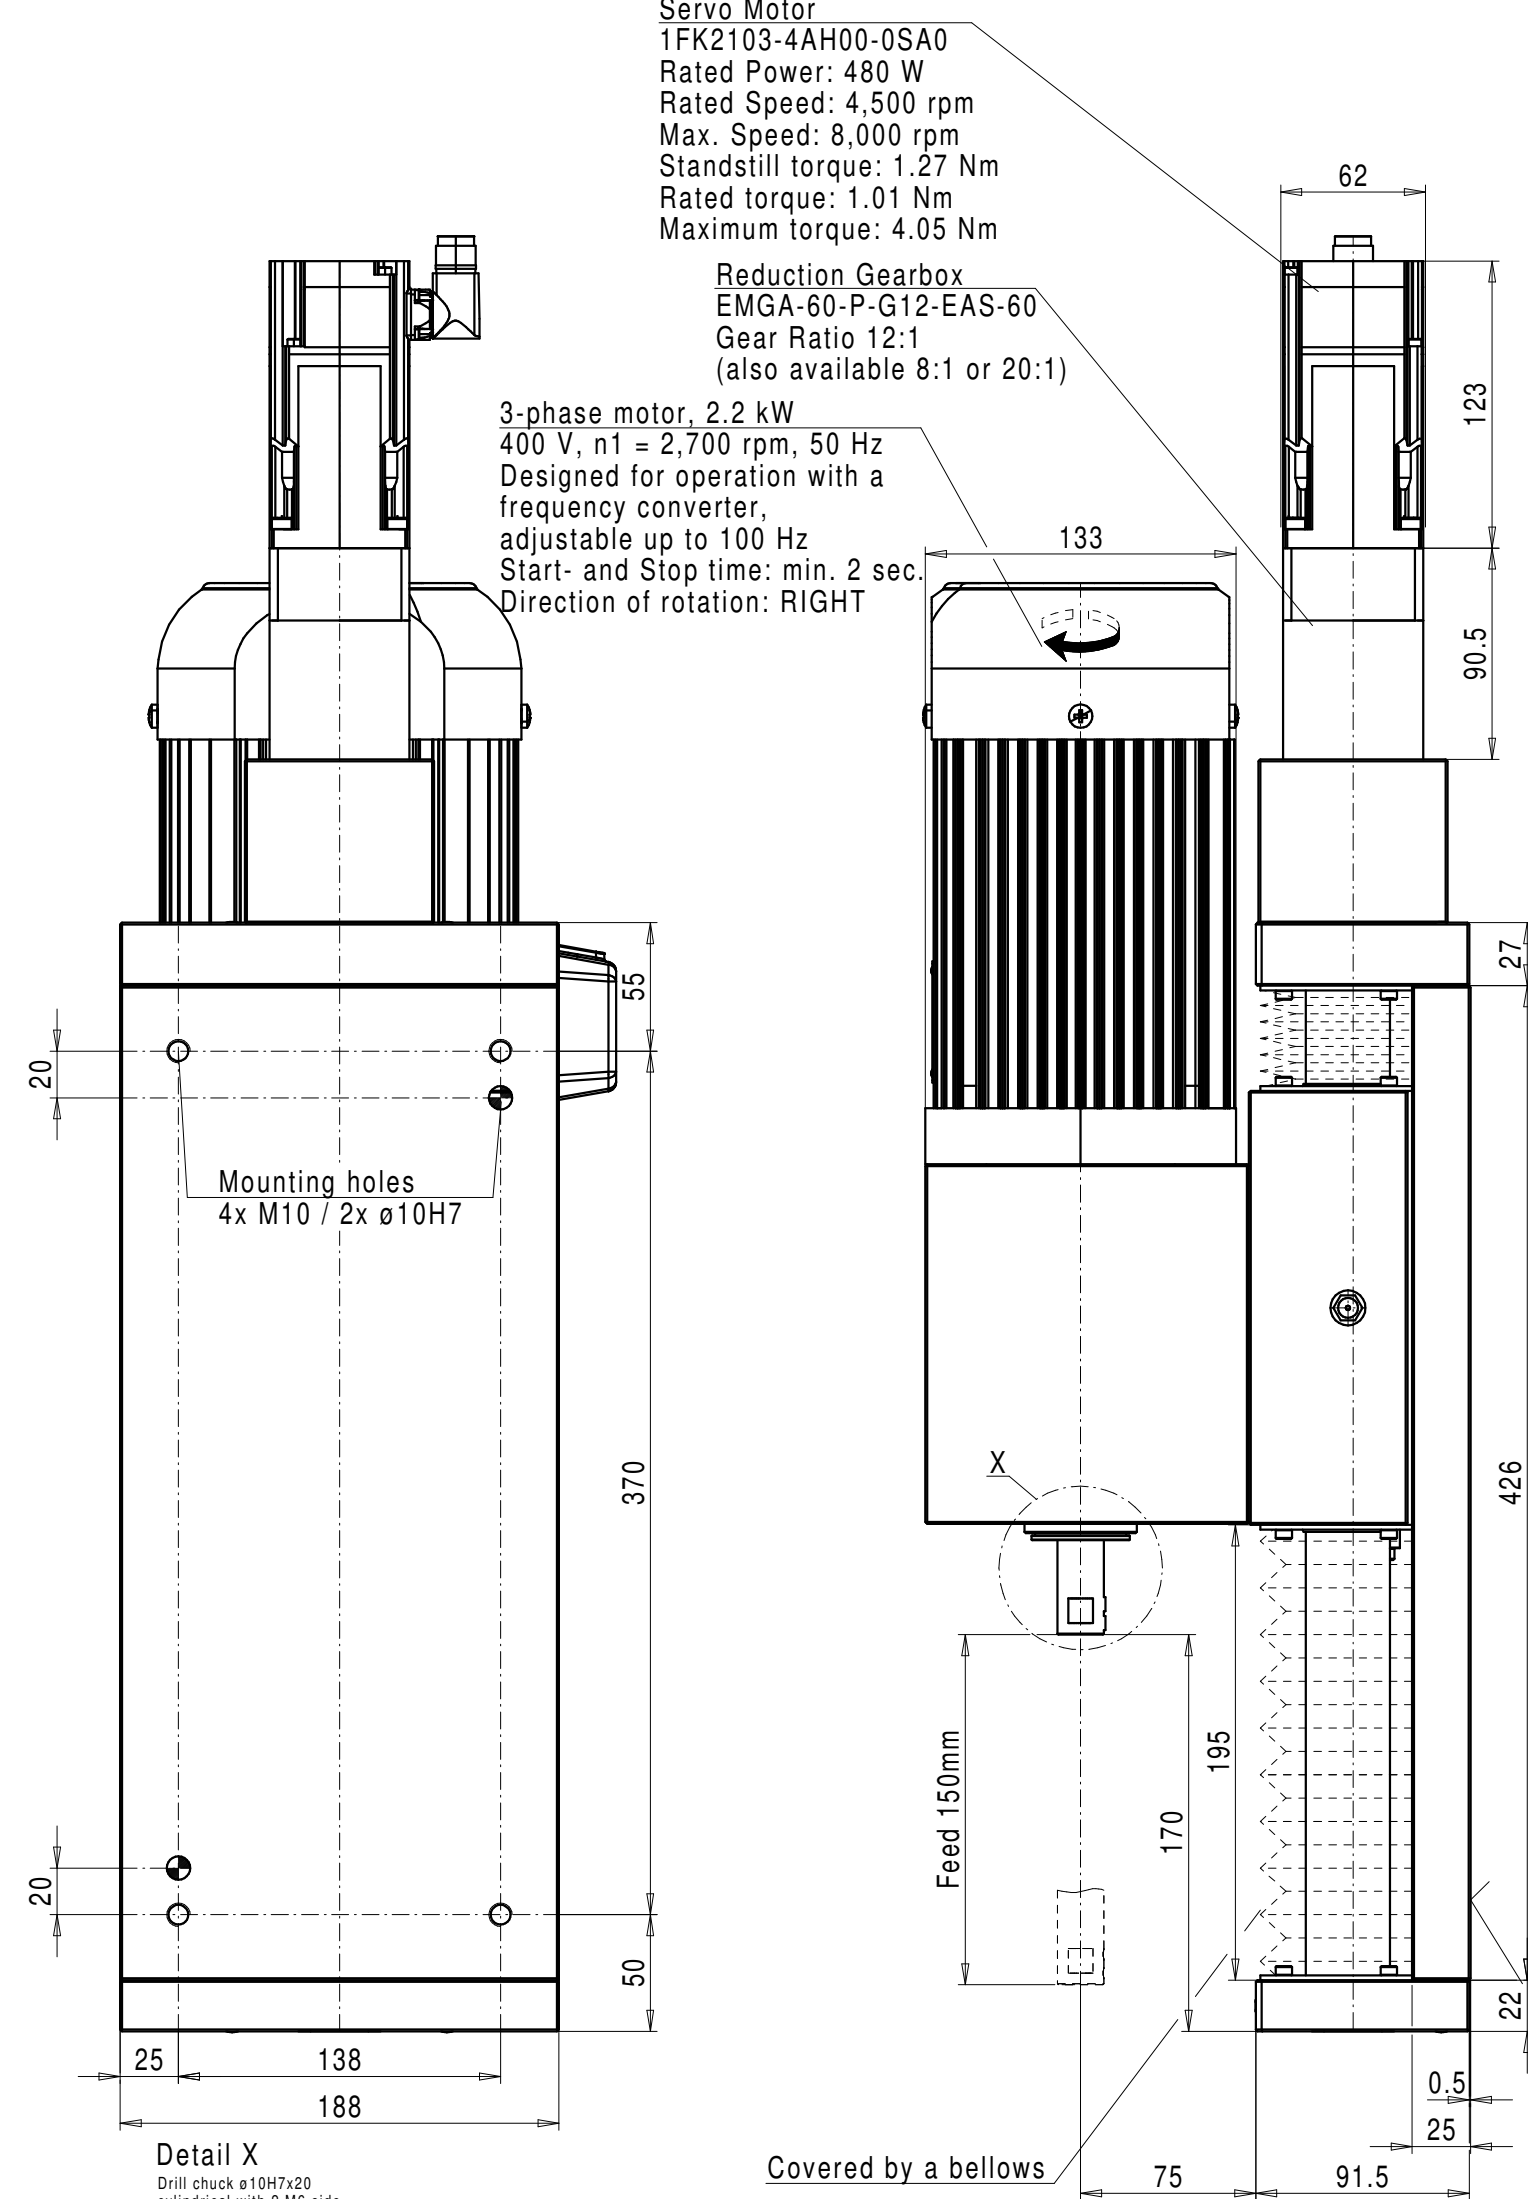

Technical Specifications

Drive Axis
Guide: Steel shaft ø36 (2x) / Sintered bronze bearings

Feed: Ball screw R16x5
Servo motor (externally controlled)

Feed range: 150 mm

Drilling Unit
Drive power: 2.2 kW at 50–100 Hz

Drive rotation direction: RIGHT

Speed ratio: i=1:1

50 Hz	100 Hz
Drive speed: 2,700 rpm	5,400 rpm
Spindle speed: 2,700 rpm	5,400 rpm

Tool holder: ø10H7 x 20, 2x side M6
(Additional tool holders available as options)

Rotation direction of the tool holder: Right

Weight: approx. 49,5 kg