

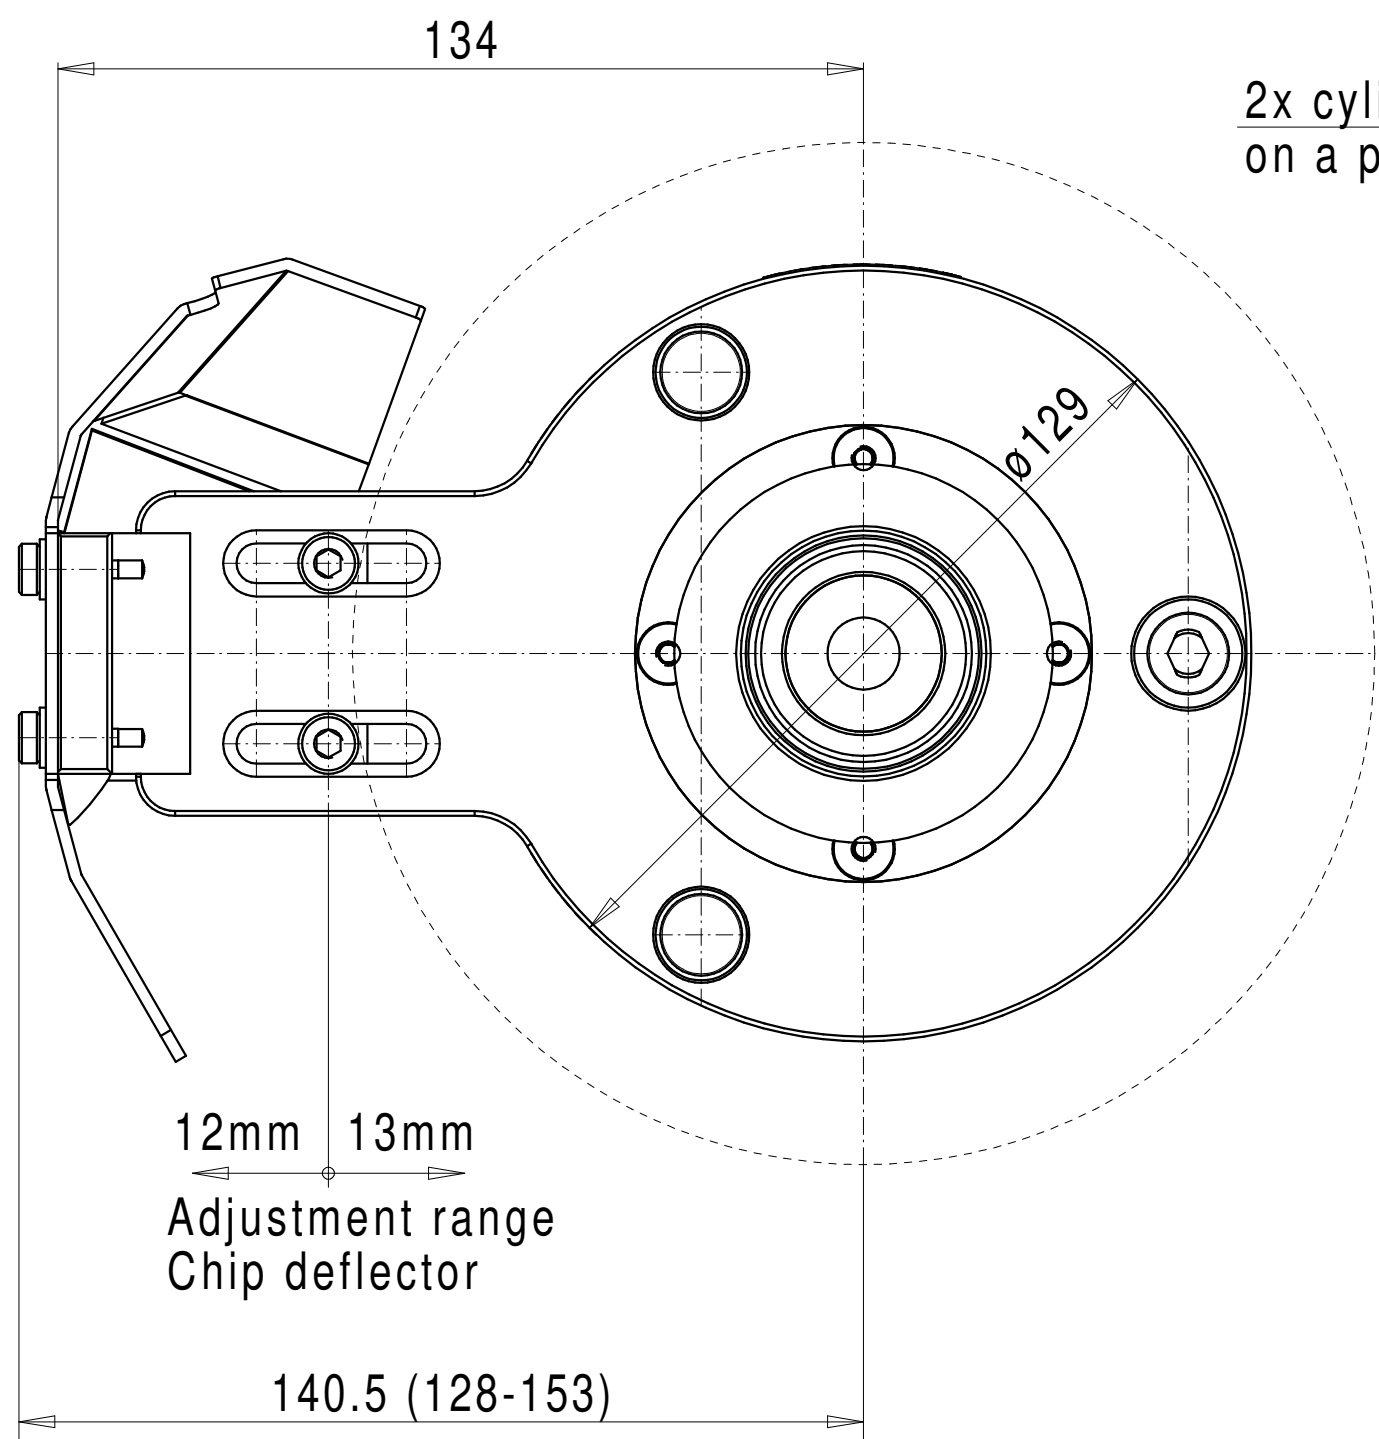
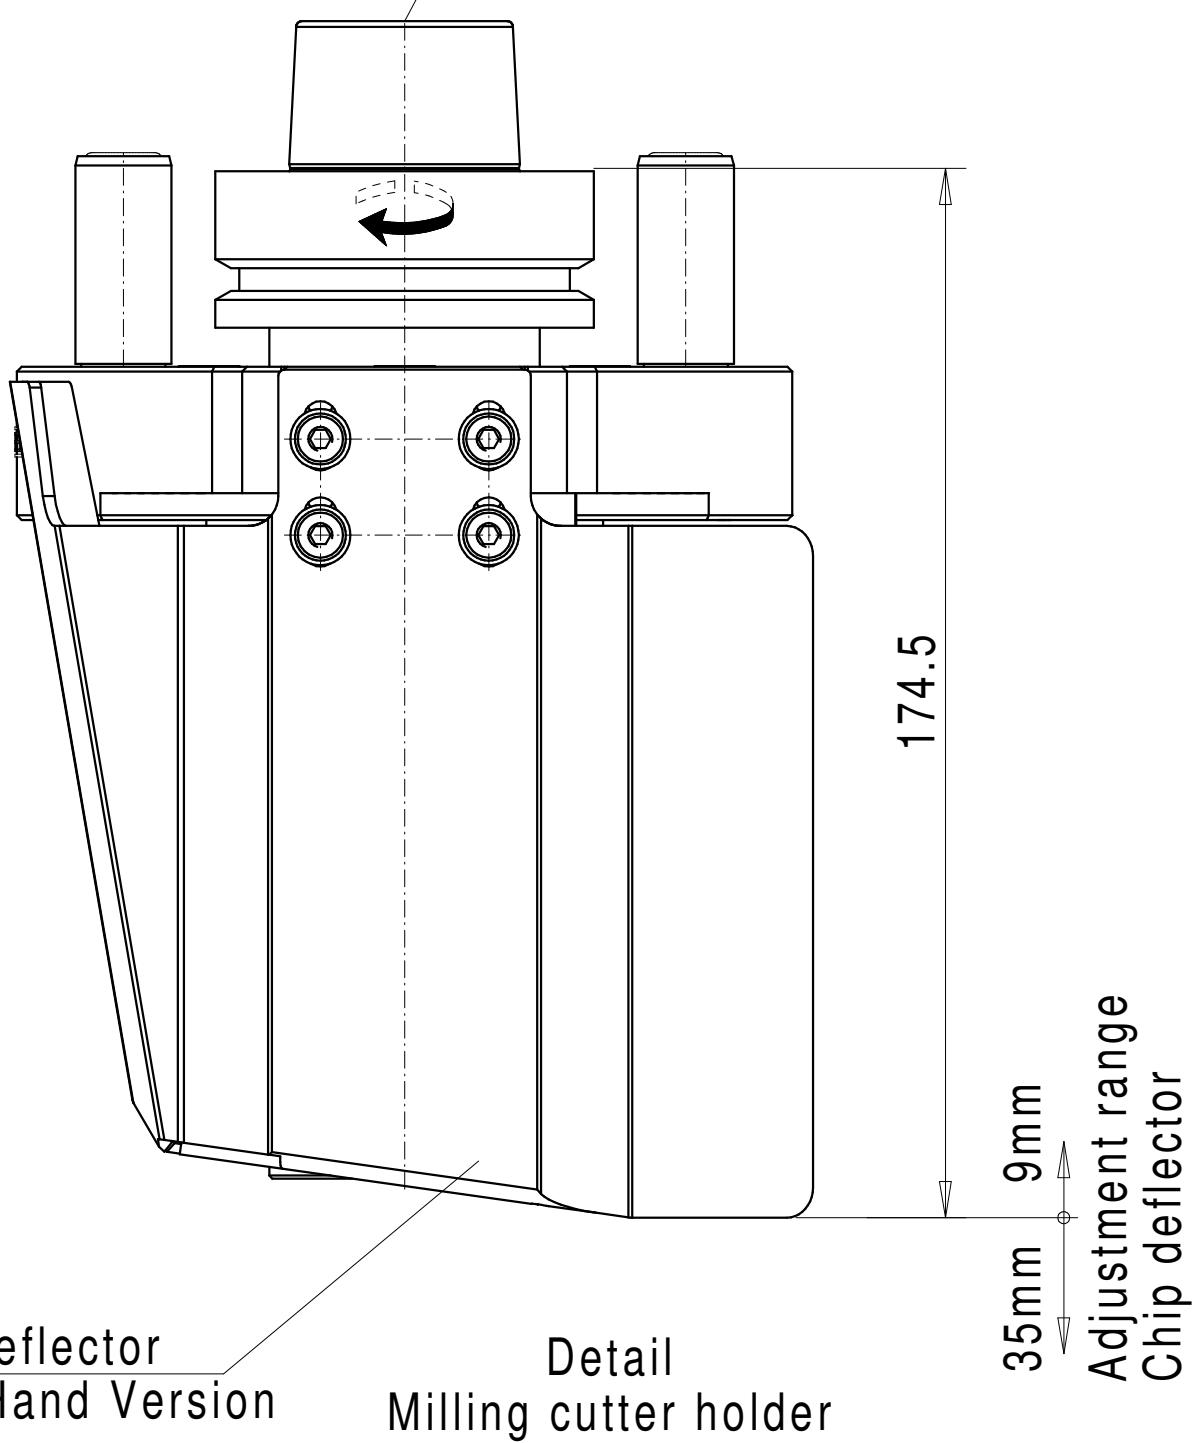


HSK-F63 Tapered Hollow Shank DIN 69893
Drive rotation direction: RIGHT

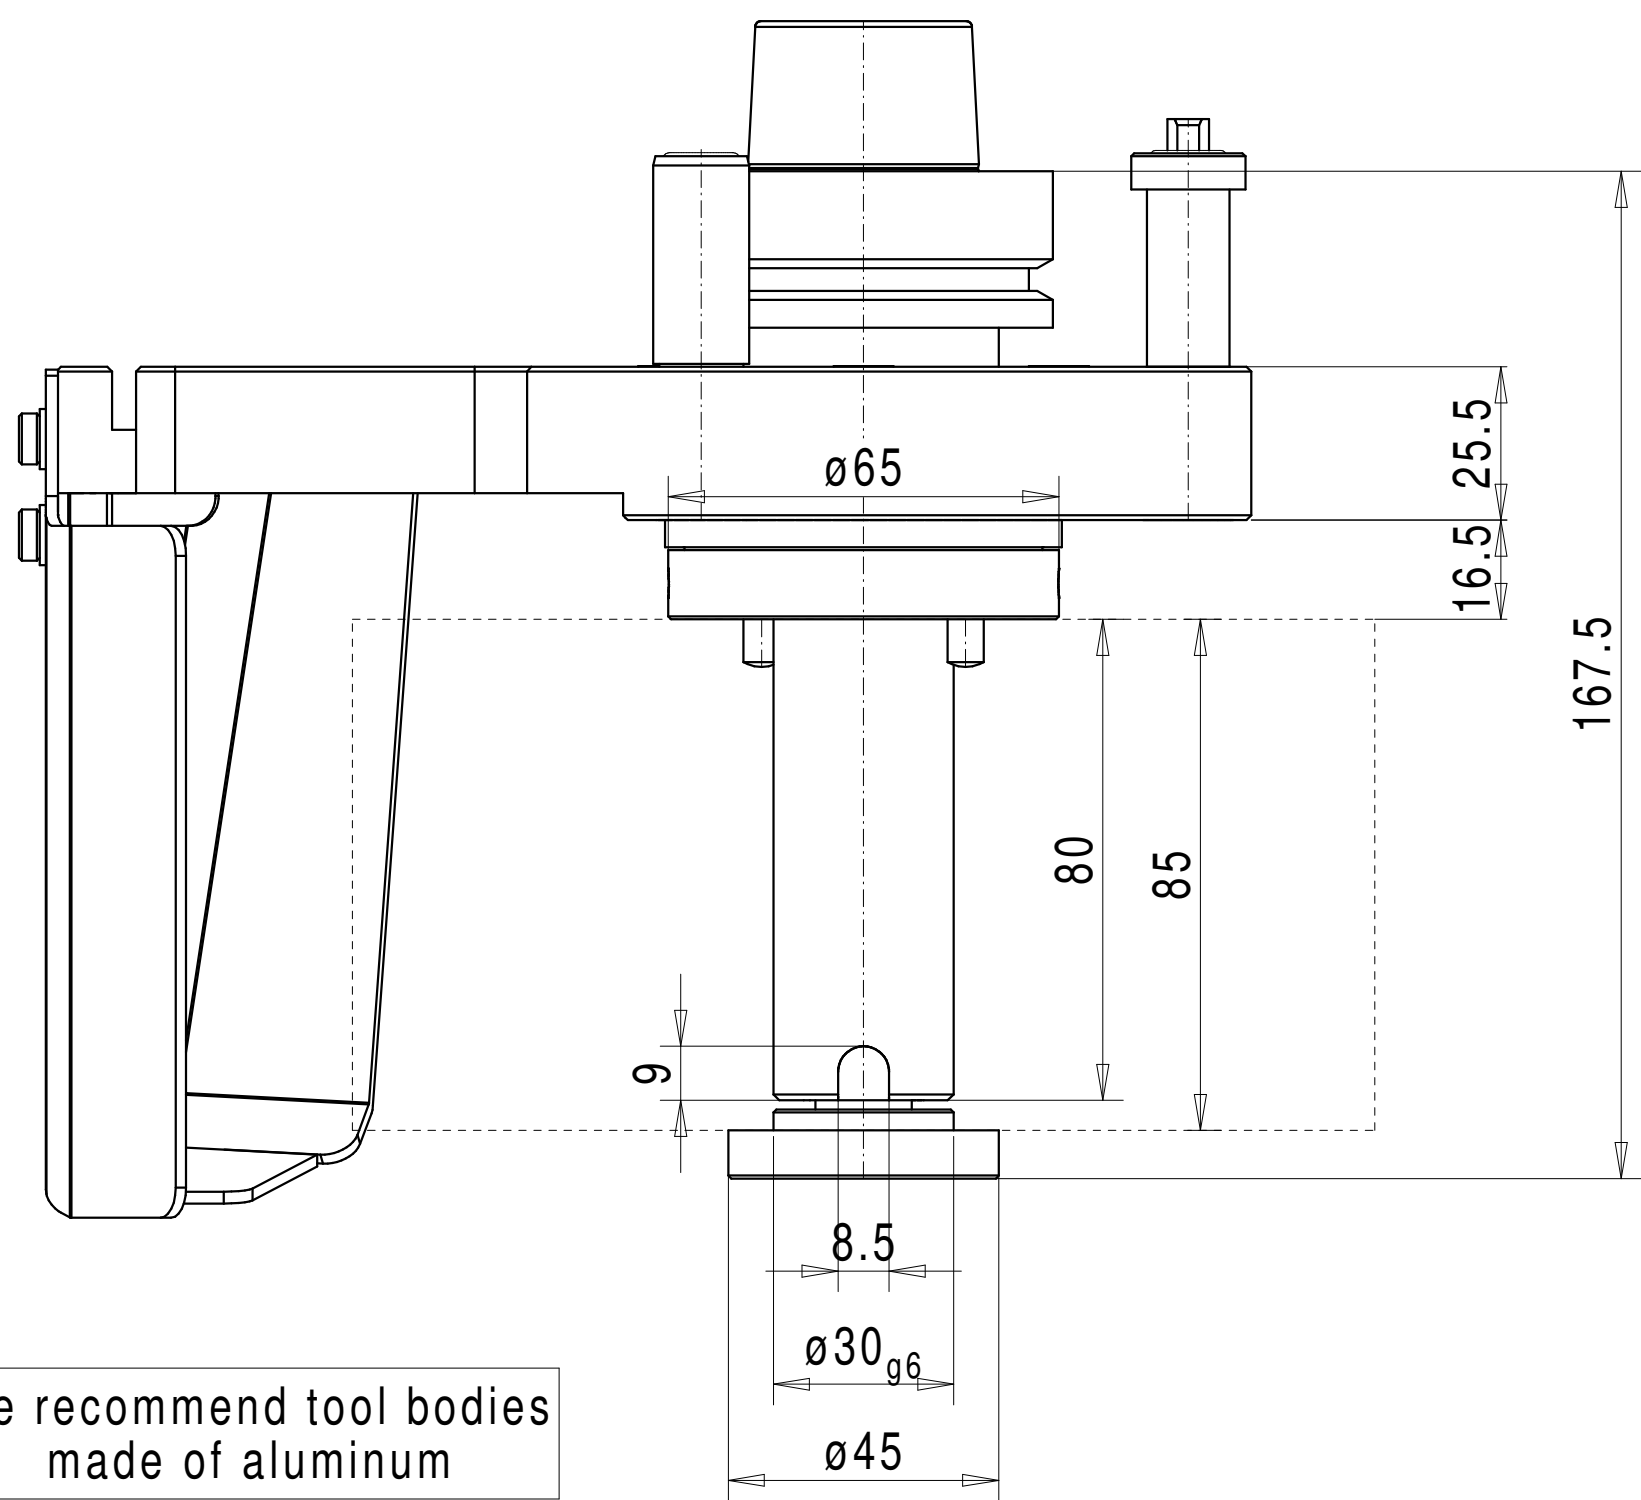

2x cylindrical pins, 6m6 diameter + 2x M6
on a pitch circle with a diameter of 48

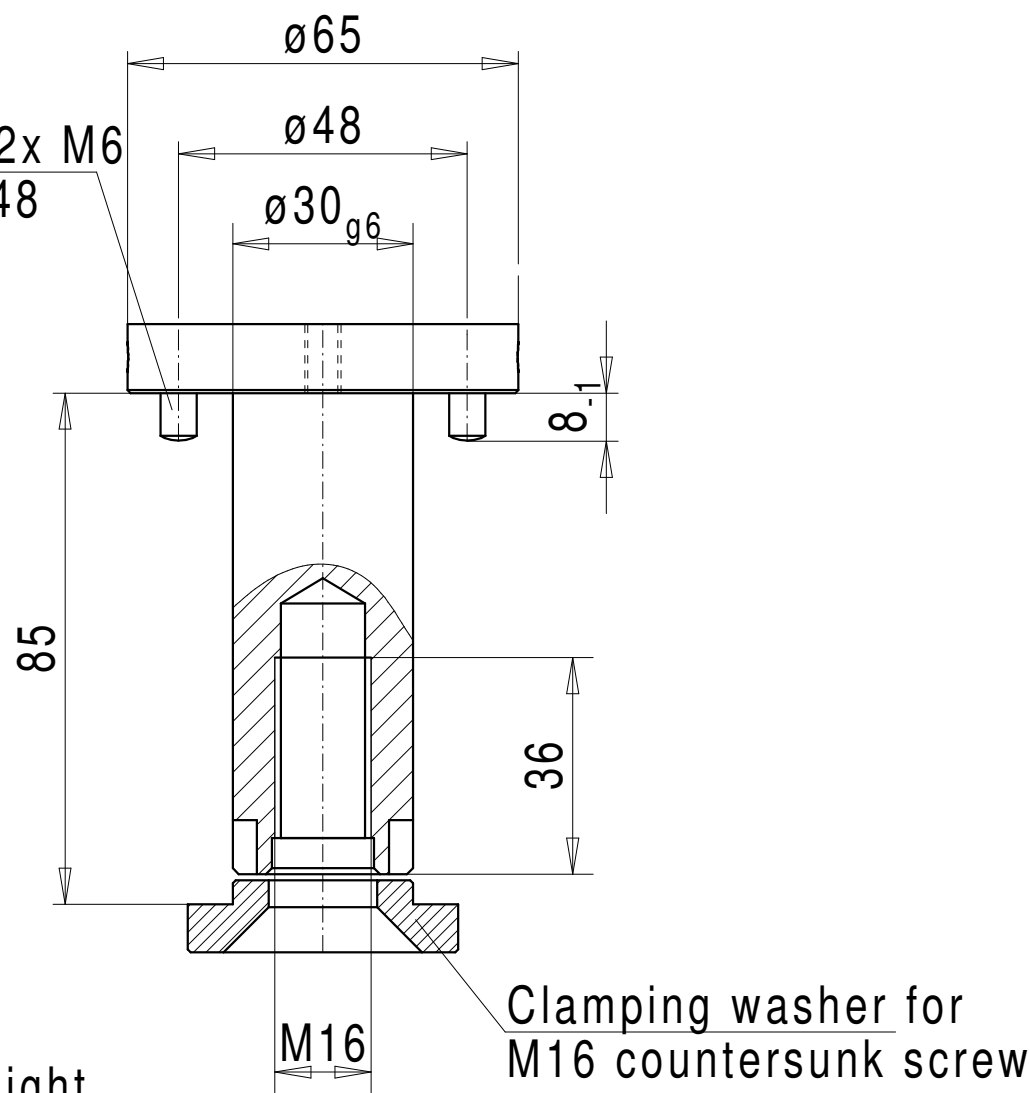

Technical Specifications

Drive rotation direction: Right

Speed ratio: $i=1:1$ (direct drive)

Drive speed: max. 18,000 1/min
Output speed: max. 18,000 1/min

Spindle power: 8 kW

Direction of rotation of the tool holder:
RIGHT

Weight: 3.3 kg